
# DHI-PHRIA3.91-RH

## Ultimate Lightweight Indoor Rental LED Display

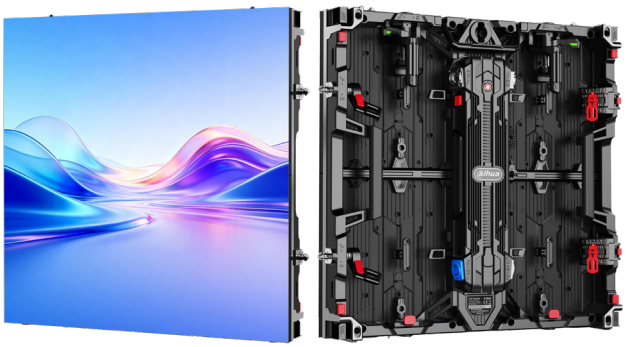

### Features :

· Die-cast magnesium cabinet,Ultimate lightweight design: 6.4kg/panel.

· Turn on the power box with one click, One step to achieve one-hand operated.

· 500x500mm and 500x1000mm cabinet size design, Flexibly adapt to multiple scenarios.

· Optional curve lock design, enable-10° ~10° at every 2.5° step, Support ±10°,±7.5°,±5°,±2.5°,0°.




### Technical Specification


| Model | |
|---|---|
| Model | DHI-PHRIA3.91-RH |

| Parameters | |
|---|---|
| Pixel Pitch | 3.906mm |
| Pixel Configuration | 1R1G1B |
| LED Type | SMD2020 |
| Brightness (Max) | 1000 nit |
| Color Temperature | 6500K-9300K (adjustable) |
| Viewing Angle | H160° / V160° |
| Pixel Density | 65,536 dots/m² |
| Module Size | W250mm×H250mm |
| Module Resolution | 64x64 dots |
| Cabinet Size | W500mm×H500mm×D75mm |
| Cabinet Resolution | 128×128 dots |
| Cabinet Weight | 6.4 kg ± 0.5kg |
| Cabinet Material | Die-cast Magnesium |

| | |
|---|---|
| Operating Temperature/ Humidity | -10℃~+40℃/10~80%RH |
| Storage Temperature/ Humidity | -20℃~+60℃/10~80%RH |
| IP Rating | Front IP20/Rear IP20 |
| Aspect Ratio | 1:1 |
| Gray Scale | 16 bits |
| Contrast Ratio | 5000:1 |
| Refresh Rate | 7680Hz |
| Input Voltage | AC 110~220V (+/-10%) |
| Input Power (max) | 510 W/m² |
| Input Power (Avg) | 210 W/m² |
| Installation Mode | Hanging/Stacking |
| Module Maintenance | Front/Rear Maintenance |
| PSU & Others Maintenance | Rear Maintenance |
| Signal Transmission Distance | CAT5 Cable ( L≤100m ), Multi-mode fiber ( L≤300m ), Single-mode fiber (L≤10km) |

Rev 002.000 © 2022 Dahua. All rights reserved. Design and specifications are subject to change without notice.
The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.

## Dimensions

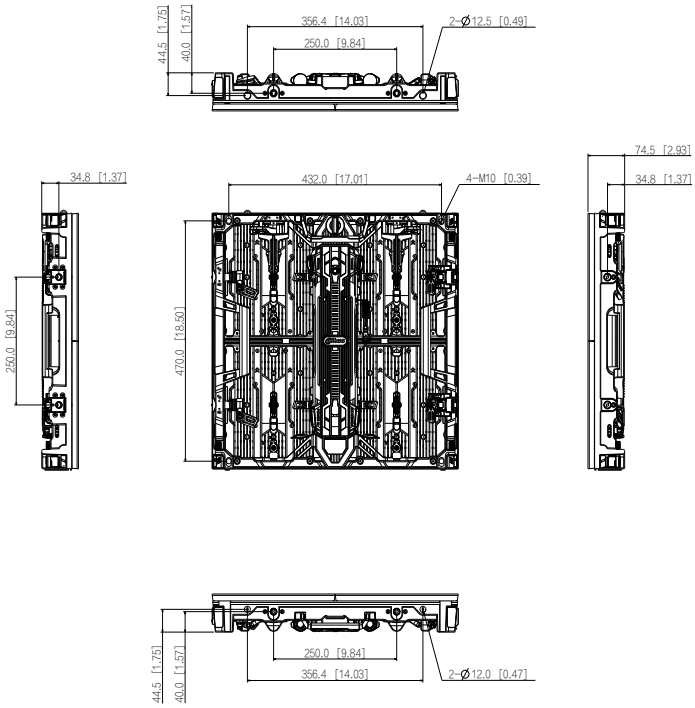


Rev 002.000 © 2022 Dahua. All rights reserved. Design and specifications are subject to change without notice.
The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.